

FIREPLACE KIT SYSTEM FROM BRUNNER




BSK 09 with Eck-Kamin 42/42/42

State: 2018-03-02




BRUNNER[®]
made in germany.

Dimension sheets - BSK 09 with Eck-Kamin 42/42/42

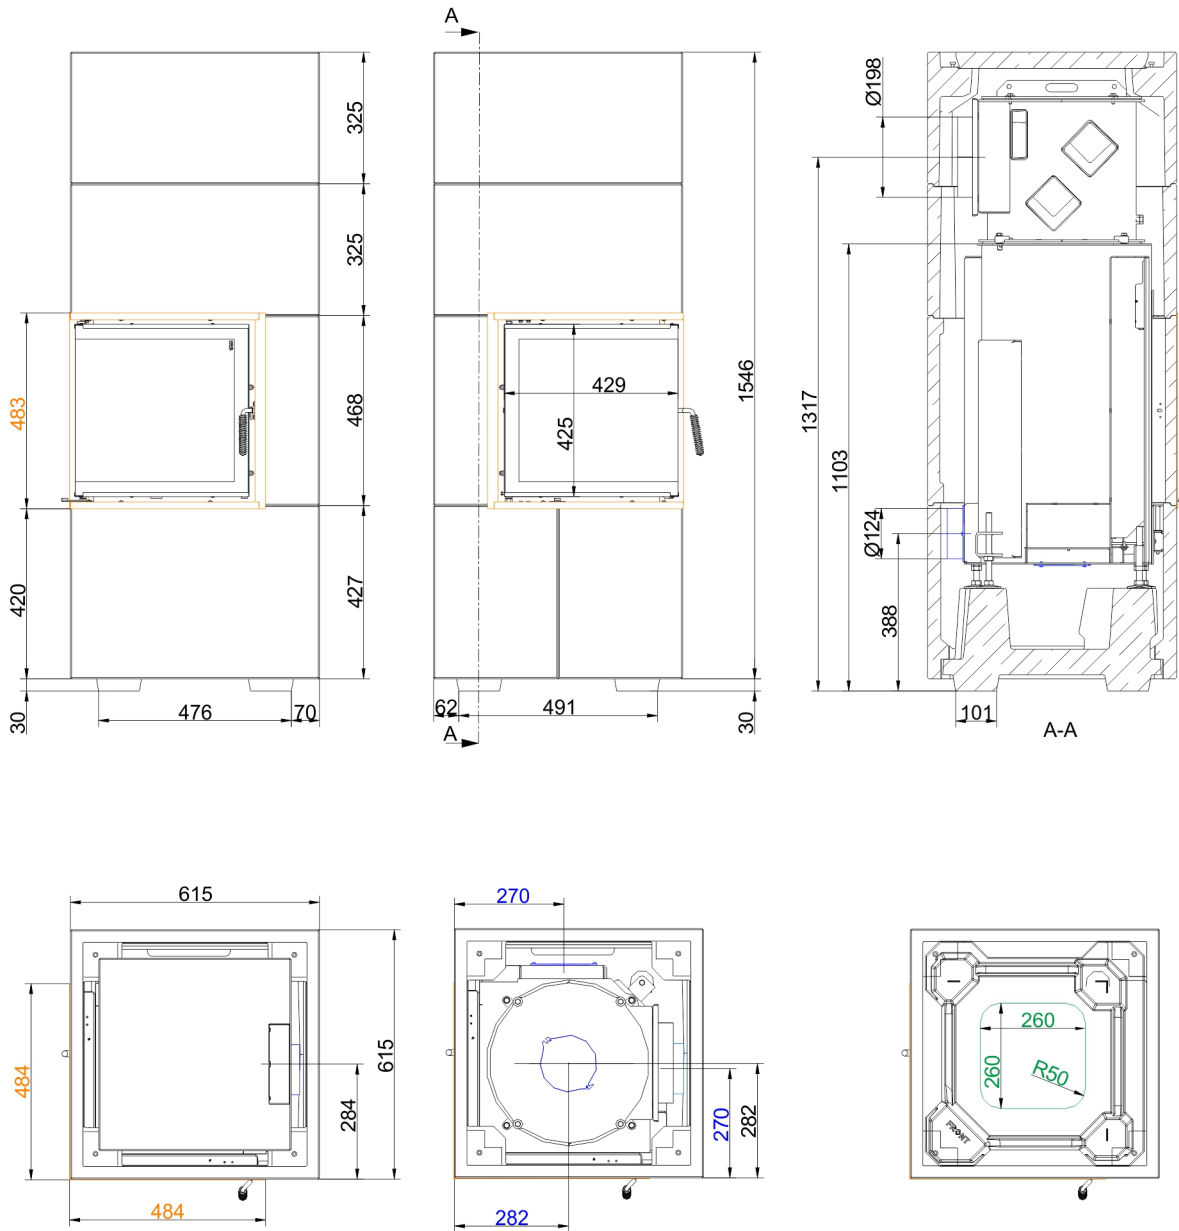


... with steel smoke hood

Dimension sheets - BSK 09 with Eck-Kamin 42/42/42

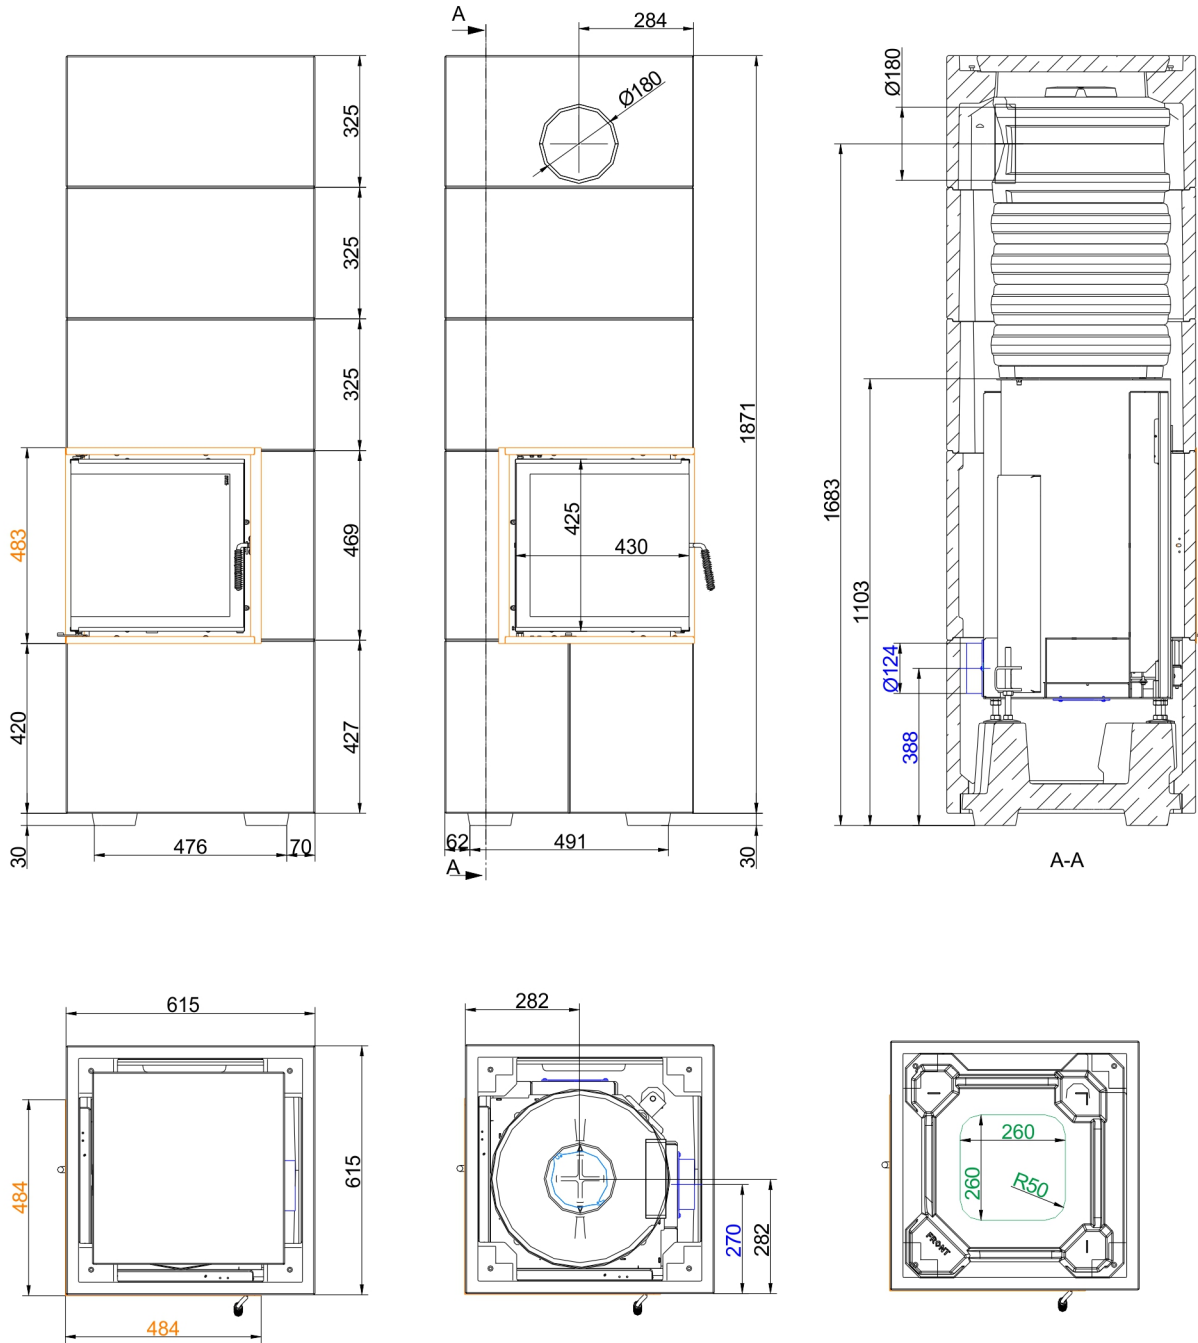

... with MAS horizontal outlet

Dimension sheets - BSK 09 with Eck-Kamin 42/42/42

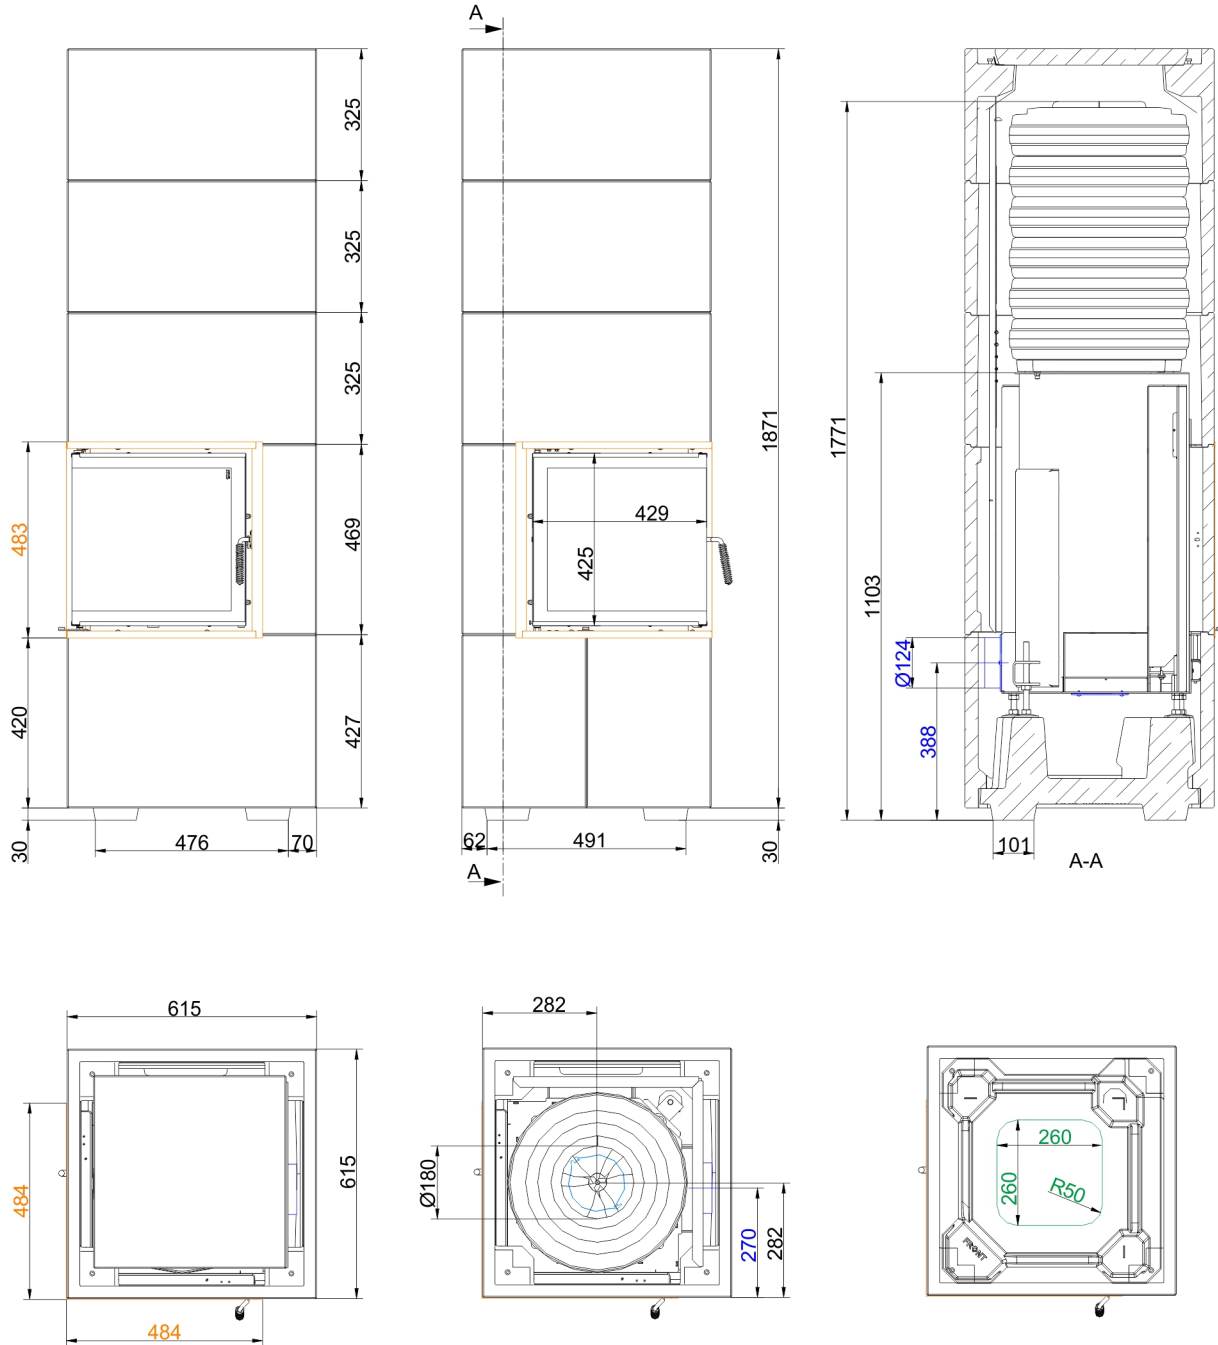

... with MAS vertical outlet

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation - BSK 09 with Eck-Kamin 42/42/42

| | | |
|--|--|-----------|
| Tested according to | | EN 13229 |
| Data for functional demonstration | | |
| Rated heat power | kW | 8 |
| Fire wood volume | kg/h | 2.7 |
| Flue gas mass flow | g/s | 7.1 |
| Flue gas temperature | g/s | 210 |
| Necessary supply pressure ¹⁾ | Pa | 12 |
| Combustion air consumption | m ³ /h | 28 |
| Combustion air connection Ø | mm | 125 |
| Cladding components | | |
| Foot print (W x D) | mm | 615 x 615 |
| Overall height | mm | 1576 |
| Height of extension ring | mm | 325 |
| Minimal distances | | |
| to mounting wall | cm | 5 |
| to mounting wall with heat protection panels | cm | 0 |
| to combustible mounting wall | cm | 10 |
| to combustible mounting wall with heat protection panels | cm | 5 |
| from top of fireplace to ceiling | cm | 50 |
| Cross-section of gratings ²⁾ | | |
| Convection air | cm ² | 608 |
| Supply air | cm ² | 732 |
| Thermal insulation without / with air gratings | | |
| In ceiling region connection without/with air grate | cm | 16 / 12 |
| Weight | | |
| Total weight | kg | 383 |
| Meets requirement/limit values for: | | |
| Germany/ Austria / Suisse / Norway | 1.BImSchV (Stufe 2) / 15a BvG (2015) / LRV / - | |

1) Damper flap recommended

2) Openings for the air