

## FIREPLACE INSERTS FROM BRUNNER




### Stil-Tunnel 51/67

State: 2018-04-30




**BRUNNER**<sup>®</sup>  
*made in germany.*

# Dimension sheets - Stil-Tunnel 51/67



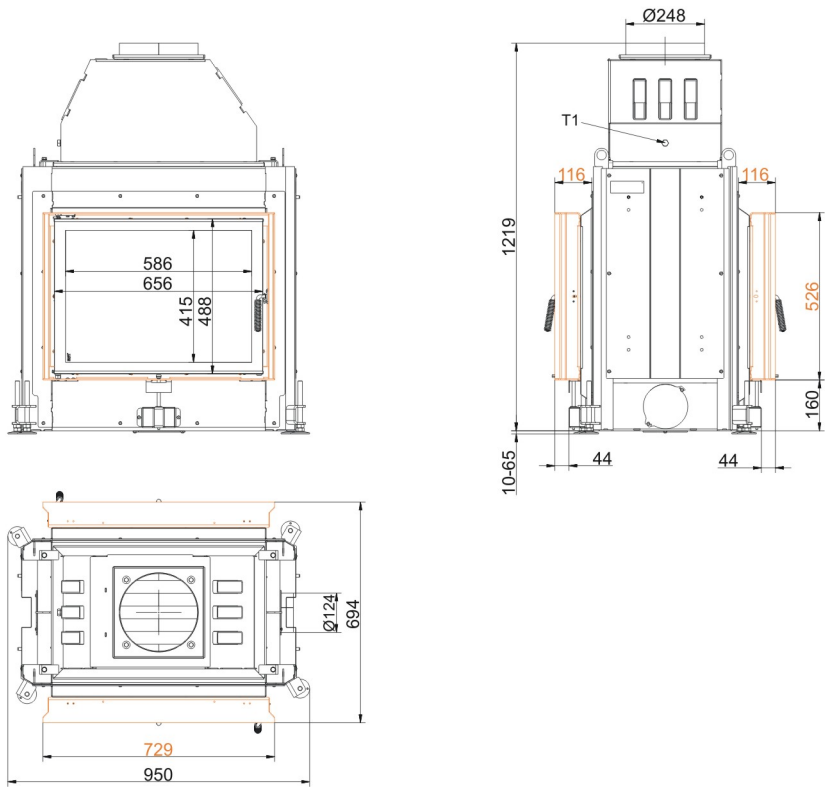


... side opening/side opening with mounting frame

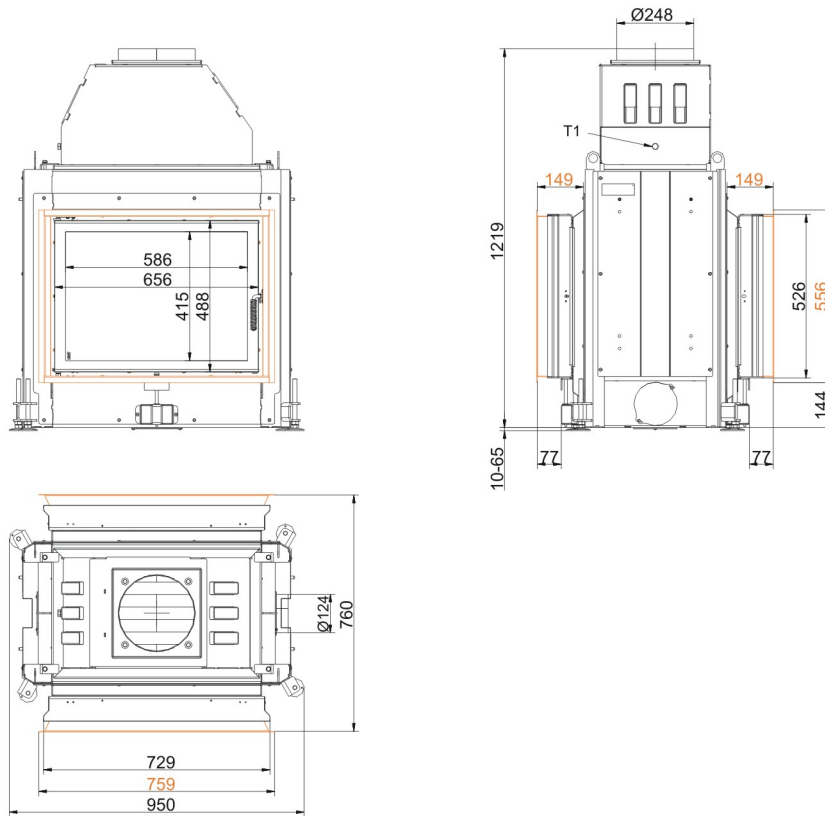




... side opening/side opening with door frame

# Dimension sheets - Stil-Tunnel 51/67

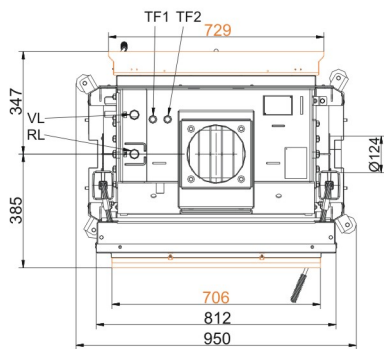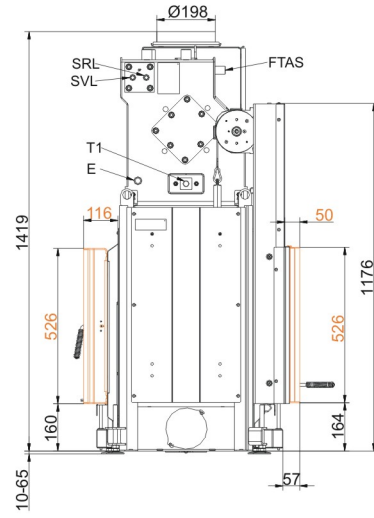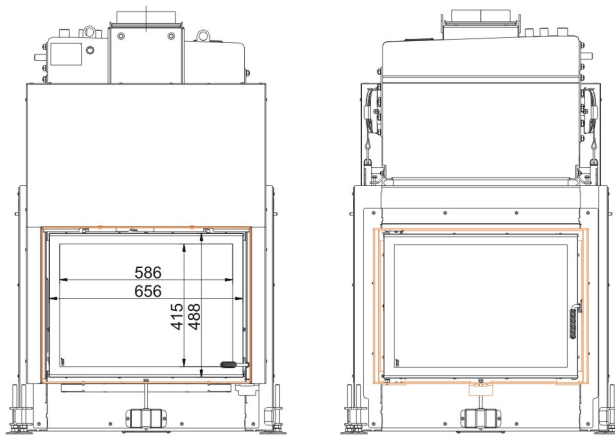

- VL supply 1"ext. th.
- RL return boiler 1"ext.th.
- E drain 1/2"int. th.
- SVL supply cooling pipe outlet ext.th.
- SRL return cooling pipe outlet 1/2"ext.th.
- FTAS socket for thermal safety sensor int.th.
- TF1 socket 1/2" for sensor int.th.
- TF2 socket 1/2" for sensor int.th.

## ... lifting door/side opening with mounting frame 50 mm/mounting frame

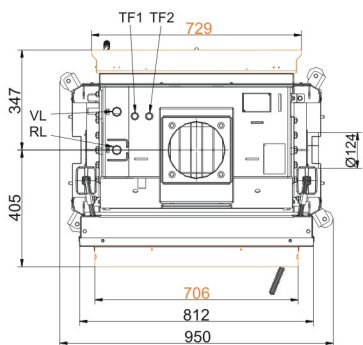
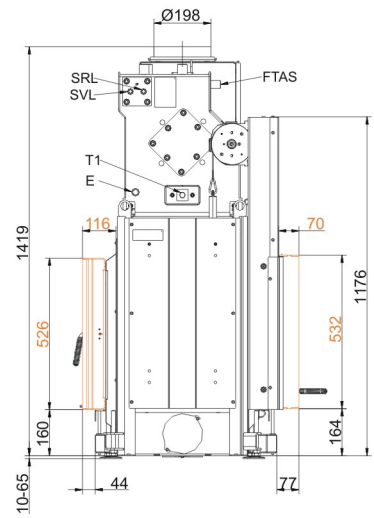
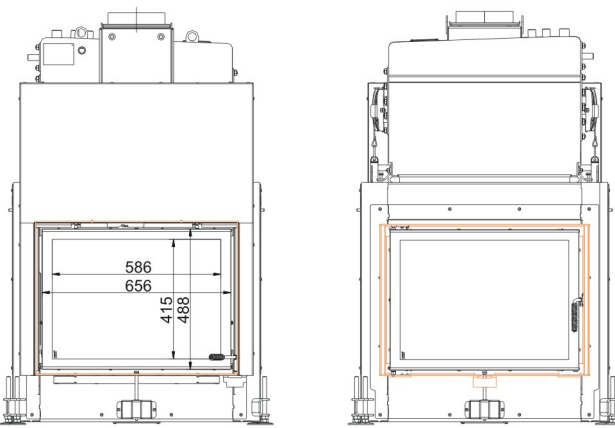


- VL supply 1"ext. th.
- RL return boiler 1"ext.th.
- E drain 1/2"int. th.
- SVL supply cooling pipe outlet ext.th.
- SRL return cooling pipe outlet 1/2"ext.th.
- FTAS socket for thermal safety sensor int.th.
- TF1 socket 1/2" for sensor int.th.
- TF2 socket 1/2" for sensor int.th.




## ... lifting door/side opening with mounting frame 70 mm/mounting frame



# Dimension sheets - Stil-Tunnel 51/67

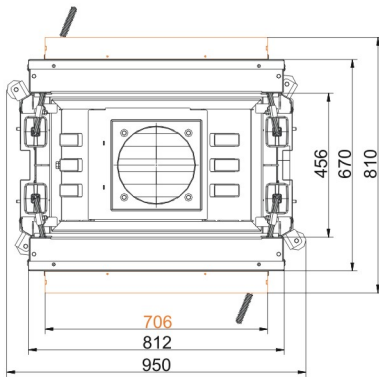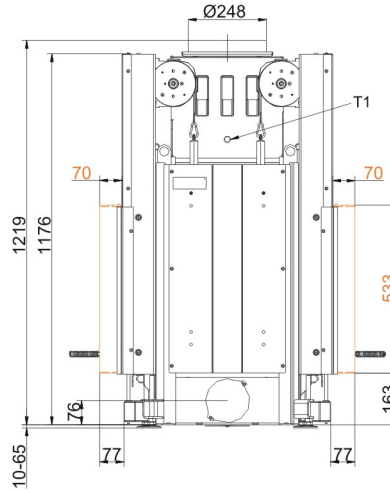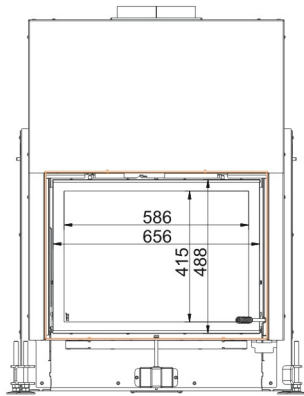


... side opening/side opening with mounting frame 70 mm

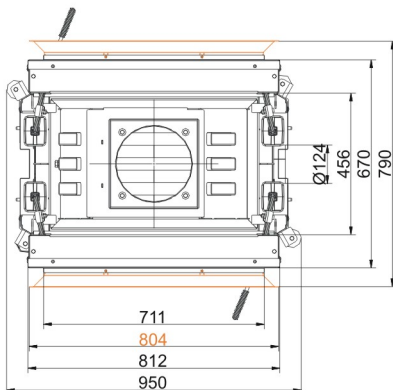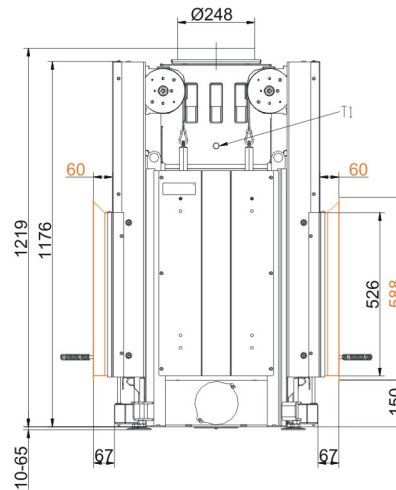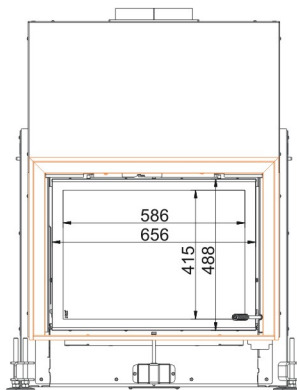

... side opening/side opening with door frame

# Dimension sheets - Stil-Tunnel 51/67

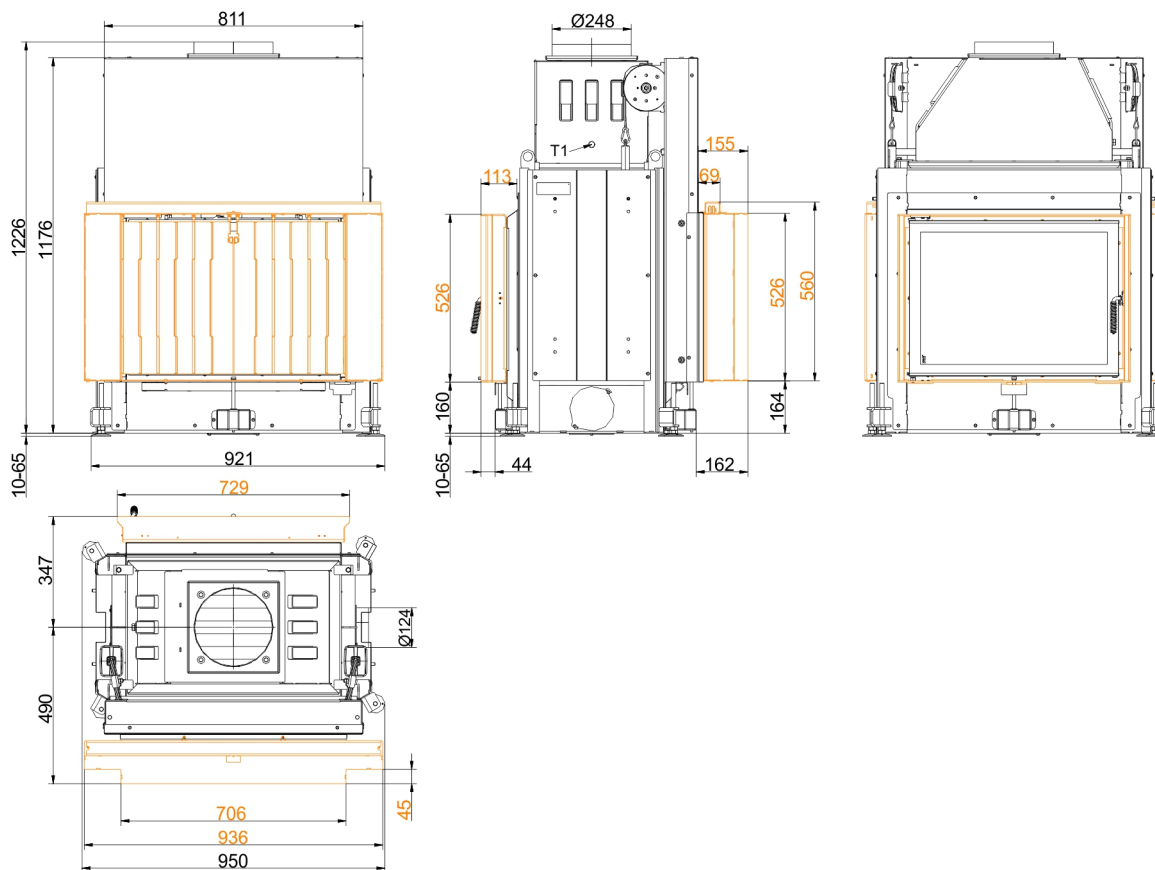

... with heatSTOP®

We suggest for CAD planing Palette CAD. Permanent updated drawings: [www.brunner.de](http://www.brunner.de)  
 Frames / front versions are marked colored.

## Planning and installation - Stil-Tunnel 51/67

Tested according to		EN 13229 W	EN 13229 W
Values measured at		Rated capacity	Accumulation
Suitable for all construction types according to rules		OK	OK
EEL		108.6	108.6
<b>Data for functional demonstration</b>			
Rated heat power	kW	11	-
Fire wood volume	kg/h	3.3	5
Combustion performance	kW	14	23
Flue gas mass flow	g/s	10.5	22
Flue gas temperature after:			
attached steel smoke hood	°C	190	250
Necessary supply pressure	Pa	13	13
Combustion air consumption	m <sup>3</sup> /h	40	40
Combustion air connection Ø	mm	125	125
<b>Heat distribution</b>			
Insert / heat accumulator	%	50 / -	50 / -
Glass pane (single / double)	%	50 / -	50 / -
<b>Cross-section of gratings <sup>1)</sup></b>			
Convection air	cm <sup>2</sup>	700 / 200 / -	700 / 200 / -
Supply air	cm <sup>2</sup>	700 / 200 / -	700 / 200 / -
<b>Minimal oven surface for closed construction type</b>			
Heat dissipating surface	m <sup>2</sup>	5.5	5.5
<b>Minimal distances of the fireplace</b>			
to insulation layer	cm	8	8
to mounting floor	cm	2	2
<b>Thermal insulation without / with air gratings <sup>2)</sup></b>			
Mounting wall	cm	14 / 10	16 / 12
Floor	cm	2	2
Ceiling	cm	16 / 12	25 / 18
Brick lining for combustible wall	cm	10	10
<b>Weight</b>			
Fireplace / combustion chamber	kg	226 / 67	
<b>Meets requirement/limit values for:</b>			
Germany/ Austria / Suisse / Norway		1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / NS 3059	

1) for fireplace inserts / flue gas pipe / metallic reheating surface

2) Values determined with upper air sections; stove cladding is heat emitting.