

FIREPLACE KIT SYSTEM FROM BRUNNER




BSK 02 with Eck-Kamin 57/67/44

State: 2018-02-07




BRUNNER[®]
made in germany.

Dimension sheets - BSK 02 with Eck-Kamin 57/67/44

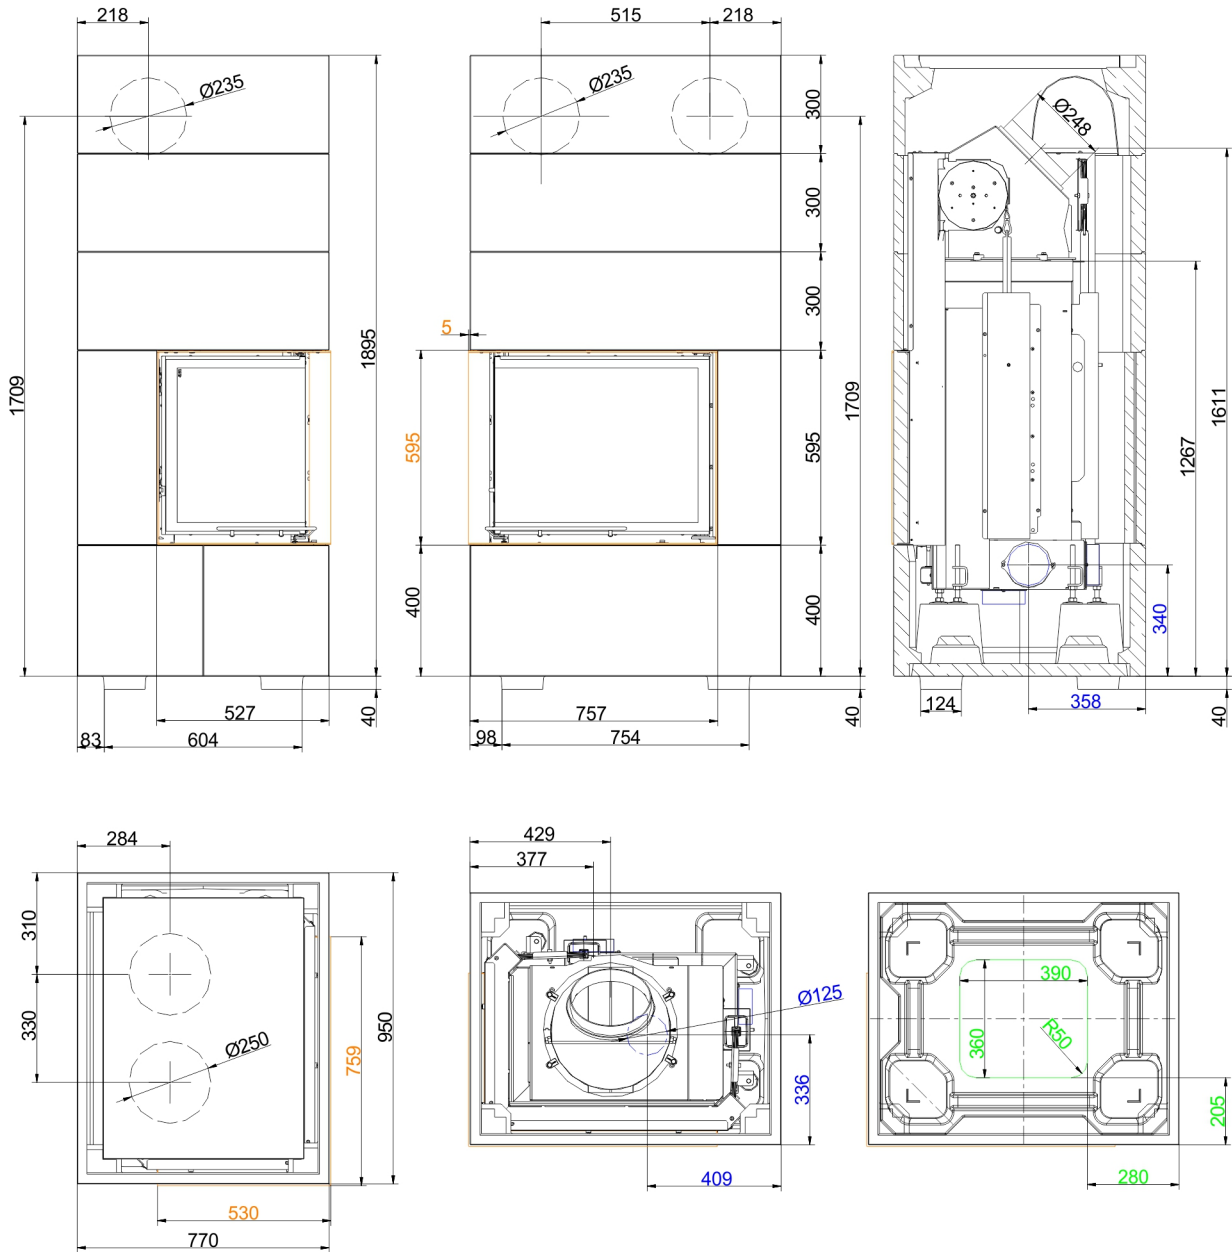

... left

Dimension sheets - BSK 02 with Eck-Kamin 57/67/44

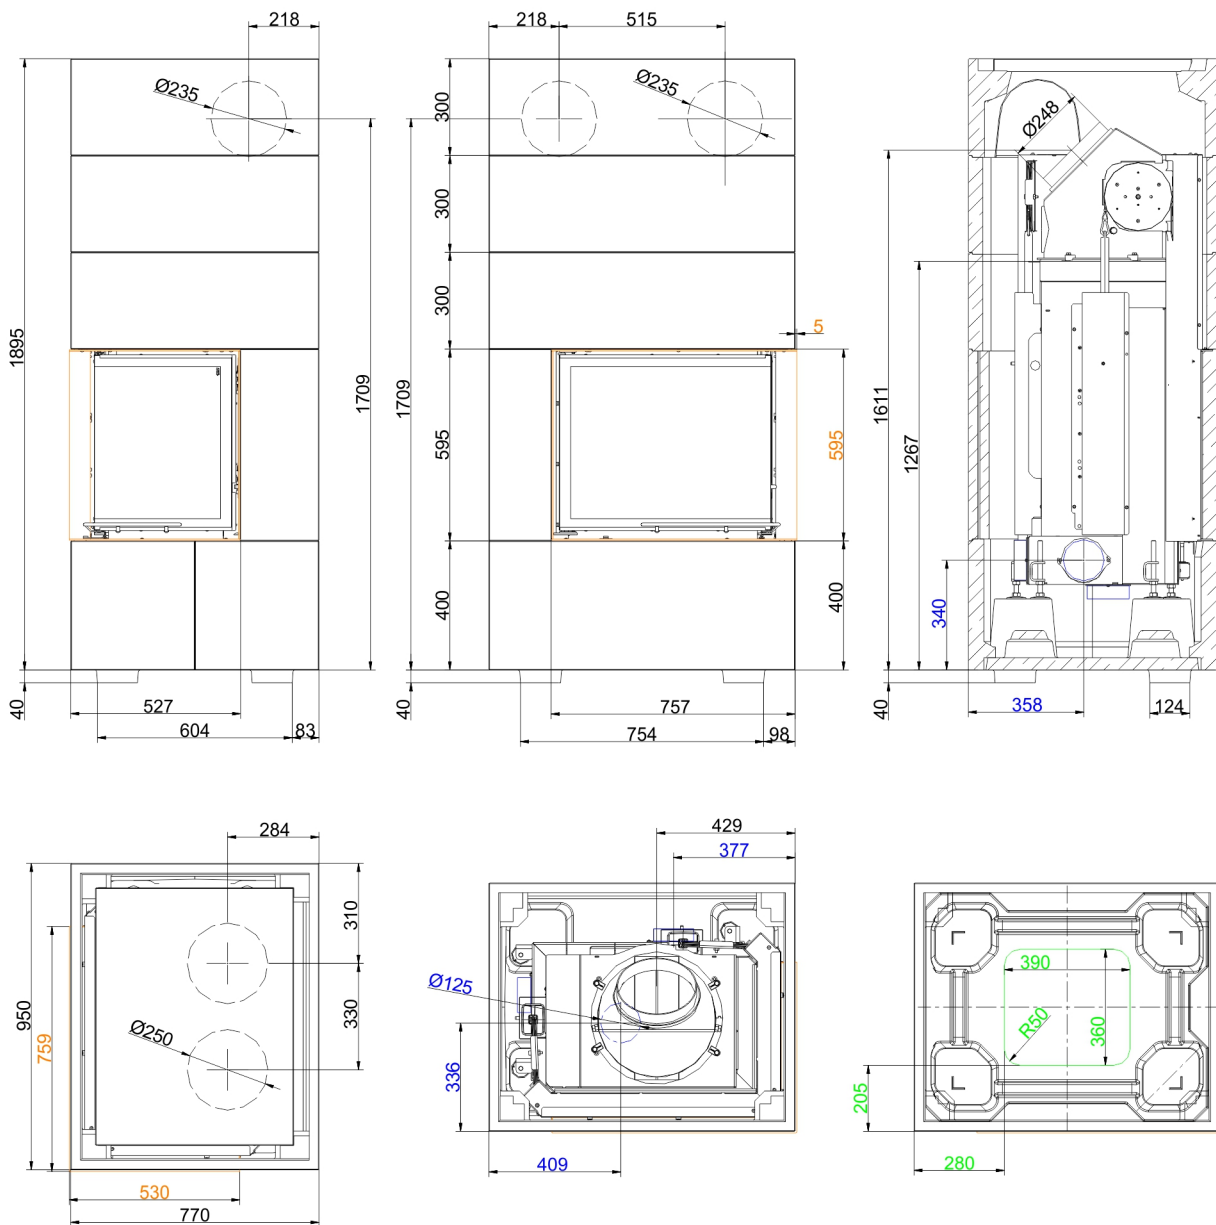

... right

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation - BSK 02 with Eck-Kamin 57/67/44

Tested according to		EN 13229
Data for functional demonstration		
Rated heat power	kW	11
Fire wood volume	kg/h	3.2
Flue gas mass flow	g/s	13
Flue gas temperature	g/s	225
Necessary supply pressure ¹⁾	Pa	13
Combustion air consumption	m ³ /h	32
Combustion air connection Ø	mm	125
Cladding components		
Foot print (W x D)	mm	950 x 770
Overall height	mm	1935
Height of extension ring	mm	300
Minimal distances		
to mounting wall	cm	5
to mounting wall with heat protection panels	cm	0
to combustible mounting wall	cm	10
to combustible mounting wall with heat protection panels	cm	5
from top of fireplace to ceiling	cm	50
Cross-section of gratings ²⁾		
Convection air	cm ²	965
Supply air	cm ²	900
Thermal insulation without / with air gratings		
In ceiling region connection without/with air grate	cm	19 / 14
Weight		
Total weight	kg	684
Meets requirement/limit values for:		
Germany/ Austria / Suisse / Norway	1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / NS 3059	

1) Damper flap recommended

2) Opening for the air